

## Micrometer 40 AB with reduced measuring faces




**DIN 863-3**

### Features

- For measuring recesses, grooves, etc.
- Chrome plated steel frame
- Spindle and anvil made of hardened steel, carbide tipped
- Scales with satin-chrome finish
- Heat insulators
- Rapid drive with integrated ratchet
- Locking device
- Supplied with: Case, setting standard (from measuring range 25 - 50 mm / 1 - 2"), operating instructions

### Technical Data

Measuring range	Readings	Error limit G	Spindle thread pitch	Order no.
0 - 25 mm	0.01 mm	4 μm	0.5 mm	<b>4134100</b>
25 - 50 mm	0.01 mm	4 μm	0.5 mm	<b>4134101</b>
50 - 75 mm	0.01 mm	5 μm	0.5 mm	<b>4134102</b>
75 - 100 mm	0.01 mm	5 μm	0.5 mm	<b>4134103</b>
<b>0 - 1"</b>	<b>.0001"</b>	<b>.00016"</b>	<b>.025"</b>	<b>4134920</b>
<b>1 - 2"</b>	<b>.0001"</b>	<b>.00016"</b>	<b>.025"</b>	<b>4134921</b>
<b>2 - 3"</b>	<b>.0001"</b>	<b>.00020"</b>	<b>.025"</b>	<b>4134922</b>
<b>3 - 4"</b>	<b>.0001"</b>	<b>.00020"</b>	<b>.025"</b>	<b>4134923</b>

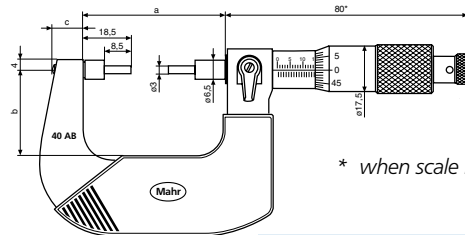

Dimensions in mm	a	b	c
0 - 25 mm / 0-1"	56	34.5	12
25 - 50 mm / 1-2"	81	47.5	12
50 - 75 mm / 2-3"	106	58.5	13
75 - 100 mm / 3-4"	131	71.5	13

## Micrometer 40 AS with sliding spindle and measuring spades




**DIN 863-3**

### Features

- For measuring narrow recesses, grooves, etc.
- Chrome plated steel frame
- Spindle and anvil made of hardened steel
- Scales with satin-chrome finish
- Heat insulators
- Rapid drive with integrated ratchet
- Supplied with: Case, setting standard (from measuring range 25 - 50 mm / 1 - 2"), operating instructions

### Technical Data

Measuring range	Readings	Error limit G	Spindle thread pitch	Order no.
0 - 25 mm	0.01 mm	4 μm	0.5 mm	<b>4134200</b>
25 - 50 mm	0.01 mm	4 μm	0.5 mm	<b>4134201</b>
50 - 75 mm	0.01 mm	5 μm	0.5 mm	<b>4134202</b>
75 - 100 mm	0.01 mm	5 μm	0.5 mm	<b>4134203</b>
<b>0 - 1"</b>	<b>.0001"</b>	<b>.00016"</b>	<b>.025"</b>	<b>4134930</b>
<b>1 - 2"</b>	<b>.0001"</b>	<b>.00016"</b>	<b>.025"</b>	<b>4134931</b>
<b>2 - 3"</b>	<b>.0001"</b>	<b>.00020"</b>	<b>.025"</b>	<b>4134932</b>
<b>3 - 4"</b>	<b>.0001"</b>	<b>.00020"</b>	<b>.025"</b>	<b>4134933</b>

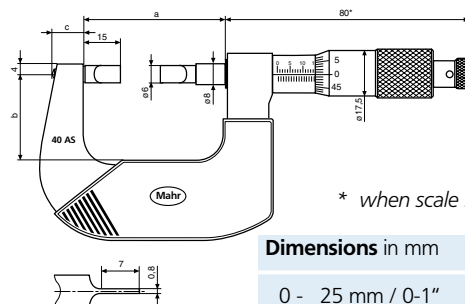

Dimensions in mm	a	b	c
0 - 25 mm / 0-1"	56	34.5	12
25 - 50 mm / 1-2"	81	47.5	12
50 - 75 mm / 2-3"	106	58.5	13
75 - 100 mm / 3-4"	131	71.5	13